

# MULTI-STAGE CONVEYOR

---

Shown With Optional Approach Conveyor



---

This conveyor is designed to extend into a trailer to accelerate the transfer of product onto a handling system or for conveyor access openings.

## FEATURES:

- VFD Controlled 3 HP Main Motorized Pulley
- 39" 120 Lbs. PVC COSxFS Approach Belt
- Automatically Retracts If The Safety Bar On The Articulating Boom Contacts An Obstruction Until Clear Of The Obstruction
- Floodlight In The Articulating Boom Illuminates The Trailer
- Eight Position Joystick - Two Directions At The Same Time
- Flat Top Approach Discharge is 60-3/4"
- Painted Per Customer Color

## OPTIONS:


- Incline Conveyor
- Base Stand For Pit Installation
- Approach Conveyor With Discharge of 76-1/2"
- VFD Controlled 1-1/2 HP Approach Belt Motorized Pulley
- RH or LH Configuration

***"FIRST CLASS DOESN'T HAVE TO COST MORE"***



WASP, Inc.  
Box 249 ■ Glenwood, MN 56334  
(320) 634-5126 FAX (320) 634-5891  
[www.waspinc.com](http://www.waspinc.com)

# MULTI-STAGE CONVEYOR

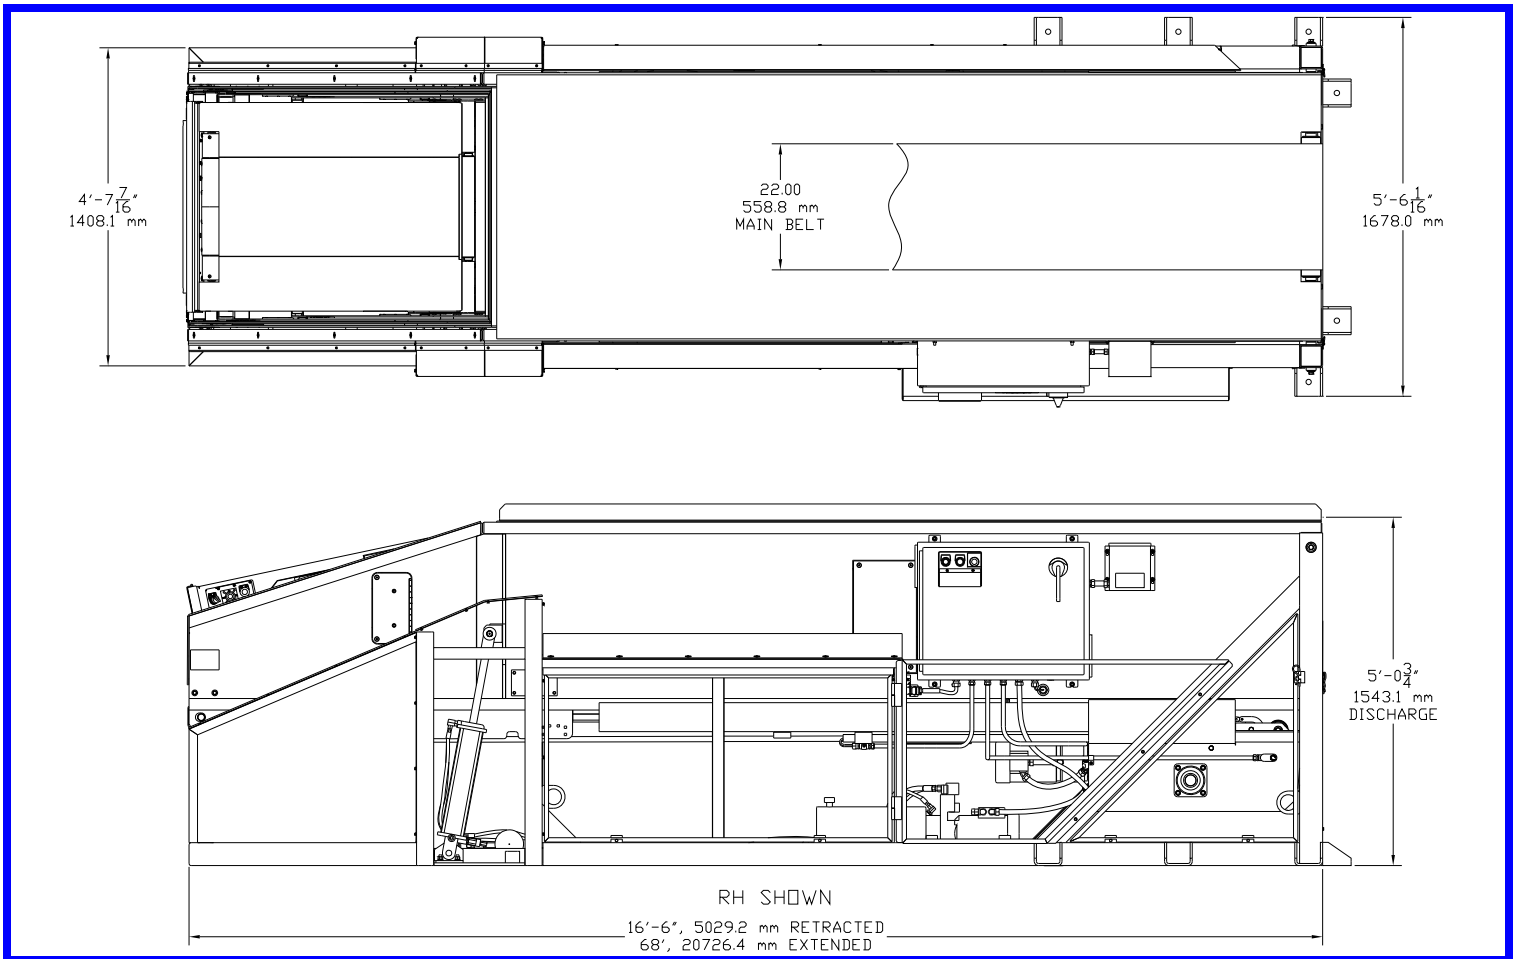

Flat Top Shown

## SPECIFICATIONS:

**WEIGHT:** 13,500 lbs. Approximately With Flat Top Approach

**UNIT LENGTH RETRACTED:** 16' 6"

**UNIT WIDTH:** 5' 6-1/16"

**ELECTRICAL:** Single Power Drop, 30 Full Load Amps @ 480V/3 PH/60 Hz

**DRIVE DRUM:** 8" Diameter Motorized Pulley

**BELT:** 22" Wide Continuous PHR2-90MF LIXBB Main Belt

**UNIT LENGTH EXTENDED:** 68'

**LOAD LIMIT:** 50 Lbs./Linear Foot, 200 Lbs. on Boom 6

**COMMON BELT SPEEDS:** 60 fpm Variable Main Belt, 80 fpm Variable Approach Belt



WASP, Inc.

Box 249 ■ Glenwood, MN 56334

(320) 634-5126 FAX (320) 634-5891

[www.waspinc.com](http://www.waspinc.com)