


Roller Bed Cargo Dolly

Efficiently maneuver heavy loads

Take on as much as 15,000 lbs (6,804 kg) of pallets and containers and move them with confidence at tow speeds up to 25 mph (40 kph).

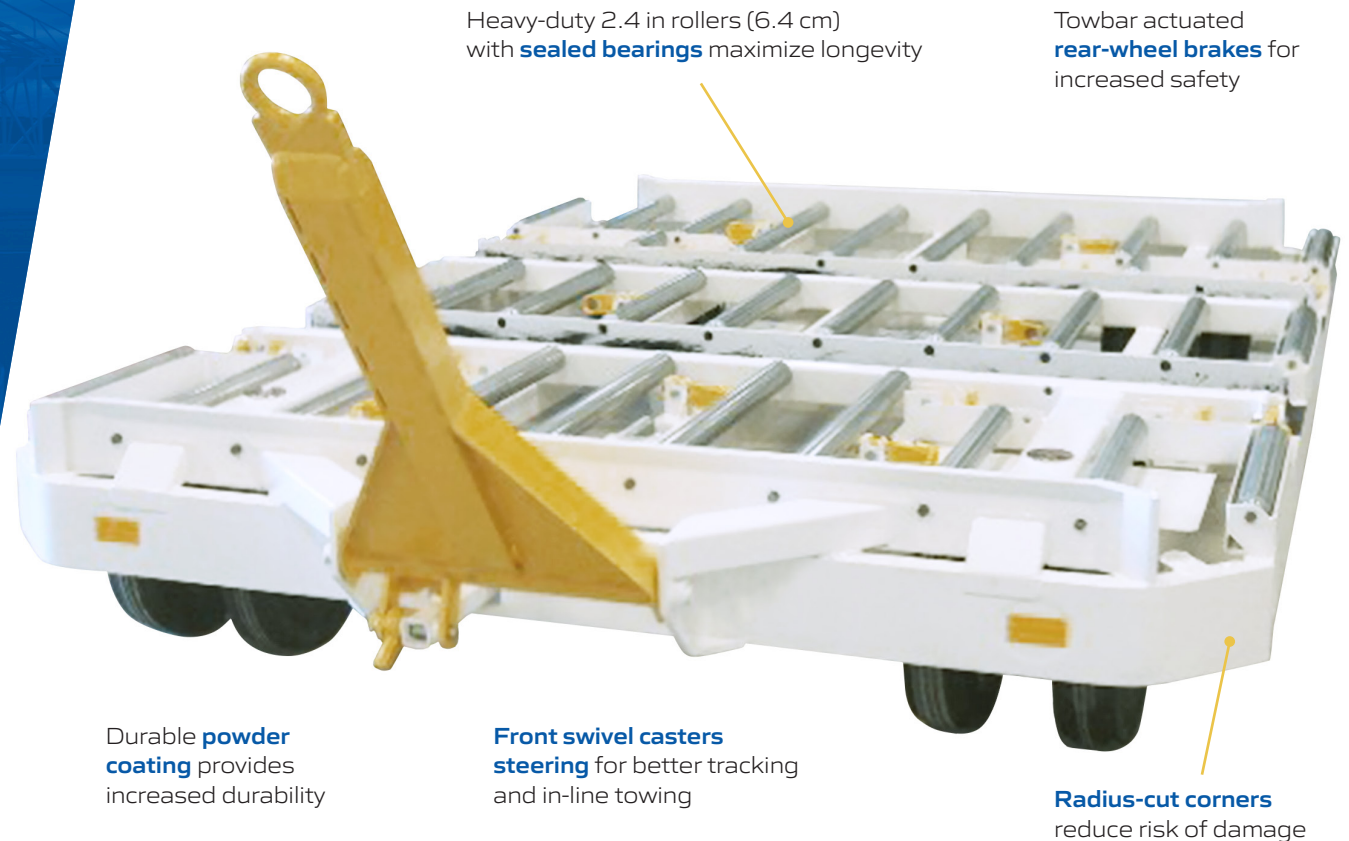

Heavy-duty 2.4 in rollers (6.4 cm) with **sealed bearings** maximize longevity

Towbar actuated **rear-wheel brakes** for increased safety

Durable **powder coating** provides increased durability

Front swivel casters steering for better tracking and in-line towing

Radius-cut corners reduce risk of damage


Options

- **Hot-dip galvanizing** provides additional corrosion resistance
- **Customized** paint colors

CARTS
LOADERS
DOLLIES
STAIRS
RACKS
DECKS

SPECIFICATIONS

Capacity	15,000 lbs (6,804 kg)
Weight	2,200 lbs (998 kg)
Length / Width	135.5 in (344.2 cm) / 102 in (259.1 cm)
Track Width	92 in (233.7 cm)
Hubs	1.5 in or 1.38 in (3.8 cm or 3.5 cm) diameters w/sealed Timken bearings
Rear Hitch	Pintle hitch standard; other types available
Brakes	Towbar-actuated rear-wheel brakes
Tires	Solid size: 4 x 8 in (10.2 x 20.3 cm) / 16 in (40.6 cm) diameter
Bed Rollers / Casters	2.5 in (6.4 cm) diameter rollers, 11-gauge with sealed bearings and 11/16 in (1.75 cm) hex shaft
Running Gear	Dual-wheeled swivel casters in front, dual-wheeled fixed axle in rear
Steering	Front swivel casters
Container Stops	Manual, spring-loaded, detented

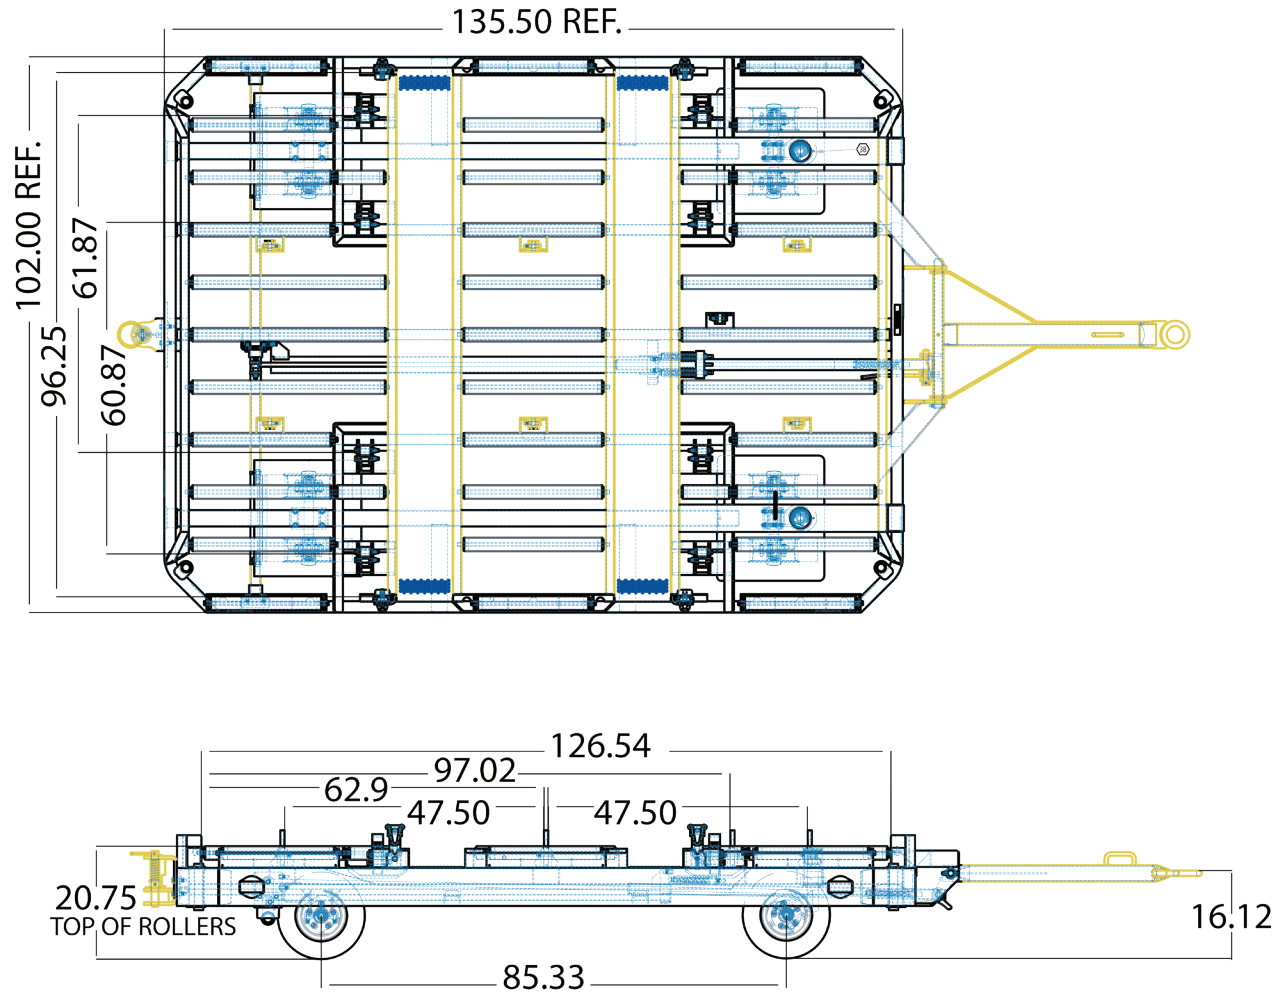

CARTS
LOADERS
DOLLIES
STAIRS
RACKS
DECKS

A world leader in ground support equipment for 40 years, we design, build and service a broad range of robust, ruggedly-built, dependable equipment for the airline and air cargo industry.

To learn more, contact our knowledgeable and experienced Team:

info@fastsolutions.com +1 (320) 634-5886 fastsolutions.com