

Caster Deck Scissor Lift

Safe, Easy Elevation for Cargo Transfer

Stationary scissor lift raises and lowers from dolly height up to trailer or dock height, for ease in loading/unloading ULDs, cargo carriers and solid surface pallets. Hydraulic lift cylinders ensure cargo is efficiently and safely elevated to appropriate transfer height. Soft stop proximity switch allows for adjusting raised position for repeated stop heights. Lift conforms with ANSI safety standard code MH29.1:2012



Options


- Available **LH and RH** control stations, or a combination of both, with one on each side
- Raised bumper kit
- Power unit cover
- Bellow wrap cover to enclose hydraulic lift unit

AIRCRAFT LOAD/UNLOAD
FREIGHT TRANSFER
CONVEYING OPERATIONS
ULD/PALLET MANEUVERABILITY



SPECIFICATIONS

Deck Width	116.0 inch / 294.6 cm
Deck Length	156.0 inch / 396.2 cm
Deck Length (between stops)	142.8 inch / 362.6 cm
Deck Height (min/max)	20.0 inch / 72.0 inch (50.8 cm/ 182.9 cm)
Capacity	15,000 lbs. / 6,800 kg
Power (floor mount)	480V 10 HP hydraulic / 3,250 PSI max pressure
Weight	7,500 lbs / 3,400 kg

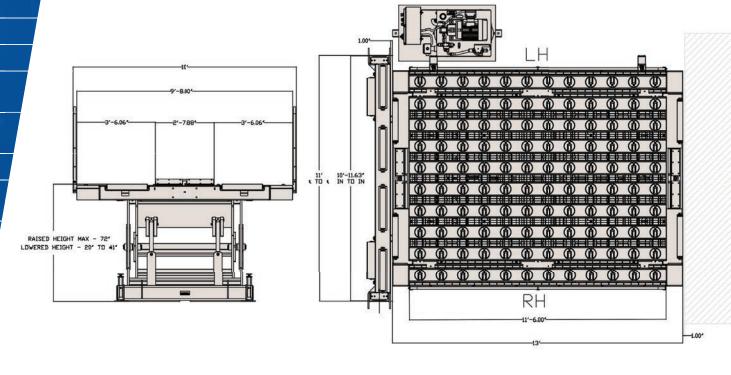

AIRCRAFT LOAD/UNLOAD FREIGHT TRANSFER CONVEYING OPERATIONS ULD/PALLET MANEUVERABILITY A world leader in airline, air cargo and material handling equipment for over 40 years, FAST Global Solutions designs, builds, installs and services an expansive portfolio of robust, ruggedly-built, dependable equipment for today's global commerce operations.

To learn more, contact the knowledgeable and experienced FAST Team:

conveyorsales@fastsolutions.com +1 (320) 634-5126 fastsolutions.com