

Enclosed Carts

Protect 8,000 pounds from the elements

Move more baggage faster with a high-capacity, reinforced steel cart designed for years of rugged use.



Vinyl curtains with webbed reinforcement to protect baggage from the elements

Corner bumpers to protect from damage on the ramp

The four-wheel, independent **rubber torsion axles** can be individually replaced for reduced maintenance expense and downtime

A **fully integrated towbar** and **hitch** allow for safe movement at 20 - 25 mph (32 - 40 kph)

Full **360° fifth-wheel** rotation allows the carts to track correctly in any direction for safety and easy maneuverability


Options

- **Bolt-in shelves** and back wall to manage baggage placement
- **Flat** or **v-style floors** to move moisture away and reduce baggage drag
- **Hot-dip galvanizing** provides greater corrosion resistance

CARTS
LOADERS
DOLLIES
STAIRS
RACKS
DECKS

SPECIFICATIONS

Capacity	Up to 8,000 lbs (3,629 kg)
Weight	1,300 - 1,500 lbs (590-680 kg)
Length / Width / Height	116 in x 60 in x 79.75 in (294.6 cm x 152.4 cm x 202.6 cm)
Track Width	52.75 in (134 cm)
Rear Hitch	Spring-loaded E-hitch
King Pin	2 in (5.1 cm) diameter, stress-proof with sealed Timken bearings
Hubs	1.375 in (3.49 cm) diameter sealed, tapered roller bearings
Panels	Body: 16-gauge, CR sheet Floor: 12-gauge, CR sheet, flat or V-style
Tires	Solid sizes: 4 x 8 in (10.2 x 20.3 cm) / 16 in (40.6 cm) diameter; 5 x 8 in (12.7 x 20.3 cm) / 18 in (45.7 cm) diameter
Running Gear	Rigid mount or four-wheel independent rubber torsion axles, with 5 x 2 x 3/16 in (12.7 x 5.1 x 0.48 cm) wall, rectangular tubing

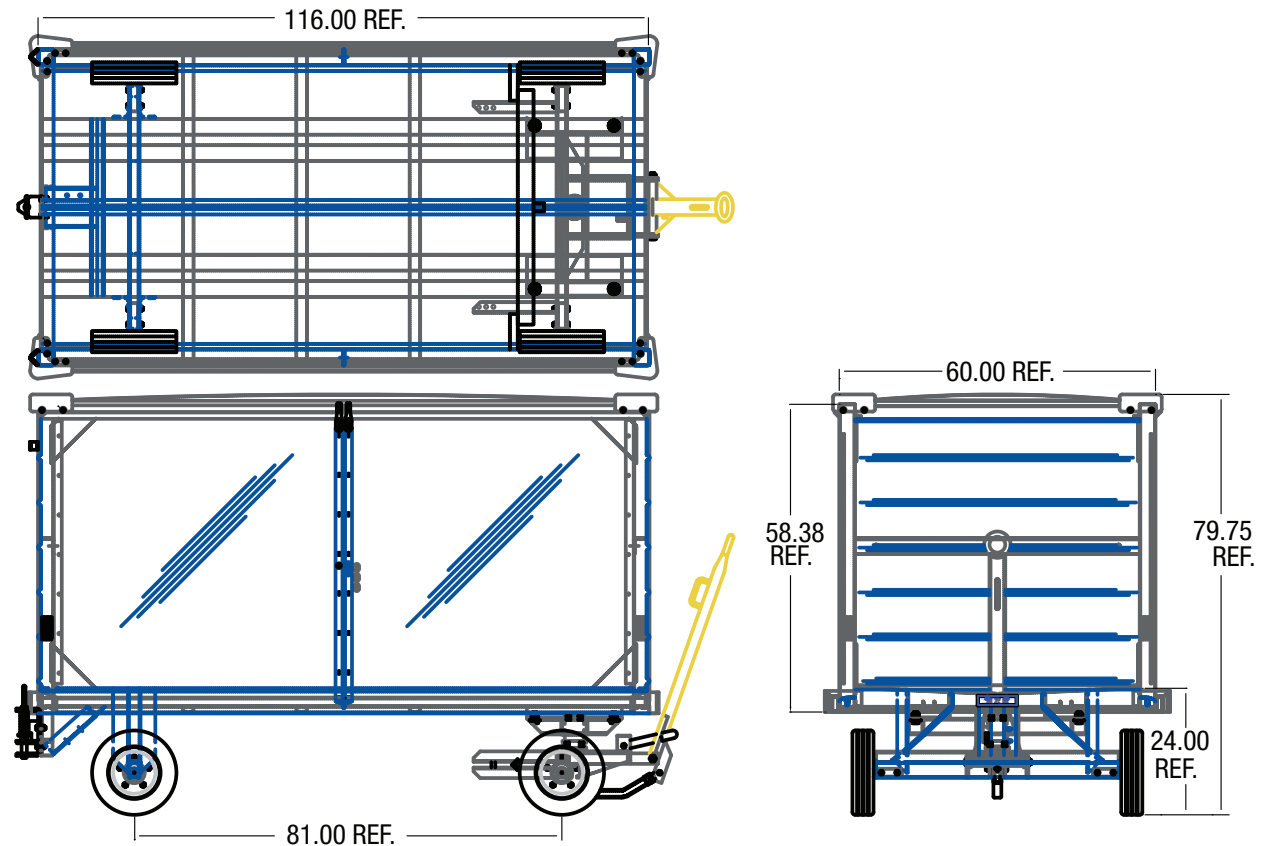

CARTS
LOADERS
DOLLIES
STAIRS
RACKS
DECKS

A world leader in ground support equipment for 40 years, we design, build and service a broad range of robust, ruggedly-built, dependable equipment for the airline and air cargo industry.

To learn more, contact our knowledgeable and experienced Team:

info@fastsolutions.com +1 (320) 634-5886 fastsolutions.com