

Knockdown Carts

Ship five in the space of one

With just a few steps, 20 knockdown carts can be ready to ship in a single 40-foot container.

Thick-gauge steel, additional strengthening ribs, strong welds, premium hardware and a shot-blast/ powder-coat process ensure the carts last and work efficiently for years.



Each cart knocks down to a **fifth of its size** and can be stacked **three - five high** for shipping




Options

- Choose from **rigid-mount** running gear or **four-wheel independent** rubber torsion axles
- **Hot-dip galvanizing** provides greater corrosion resistance
- **Center shelves, back walls** and **curtain assemblies** are available to suit any requirement

CARTS
LOADERS
DOLLIES
STAIRS
RACKS
DECKS

SPECIFICATIONS

Capacity	8,000 lbs (3,629 kg)
Weight	1,636 lbs (742 kg)
Length / Width / Height	120 - 144 in (304.8 - 365.8 cm) x 67 in (170.2 cm) x 80.25 - 82.5 in (203.8-209.6 cm)
Track Width	52.75 in (134 cm)
Rear Hitch	Spring-loaded E-hitch
King Pin	2 in (5.1 cm) diameter, stress-proof with sealed Timken bearings
Hubs	1.375 in (3.49 cm) diameter sealed, tapered roller bearings
Panels	Body: 16-gauge, CR sheet Floor: 2-gauge, CR sheet, flat or V-style
Tires	4 x 8 in (10.2 x 20.3 cm) / 16 in (40.6-cm) diameter
Running Gear	Rigid mount or four-wheel independent rubber torsion axles, with 5 x 2 x 3/16 in (12.7 x 5.1 x 0.48 cm) wall, rectangular tubing

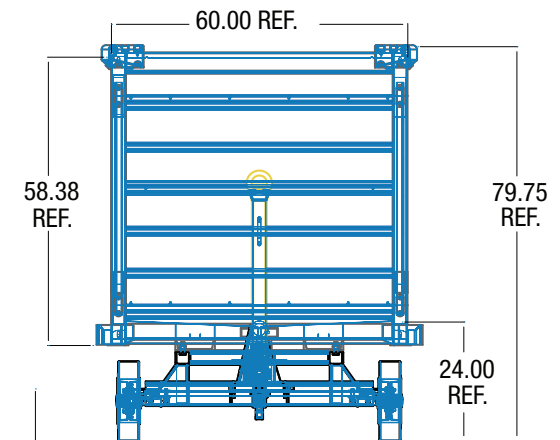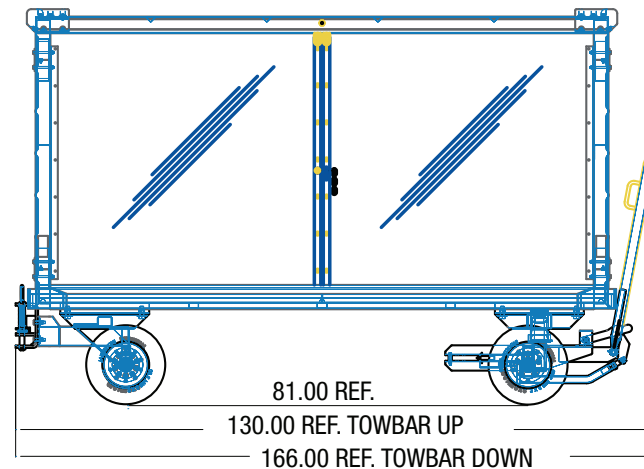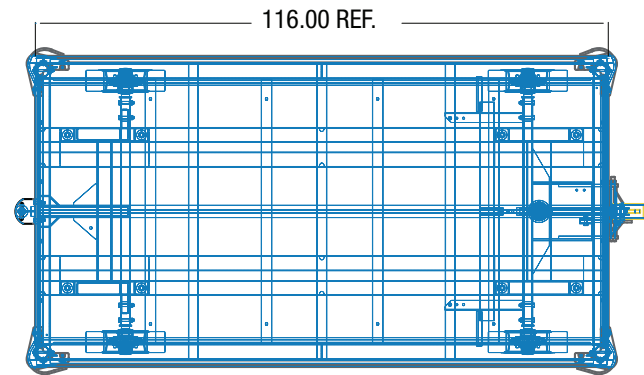

CARTS
LOADERS
DOLLIES
STAIRS
RACKS
DECKS

A world leader in ground support equipment for 40 years, we design, build and service a broad range of robust, ruggedly-built, dependable equipment for the airline and air cargo industry.

To learn more, contact our knowledgeable and experienced Team:

info@fastsolutions.com +1 (320) 634-5886 fastsolutions.com