


Open Carts

Combine high capacity with easy loading

Take on 8,000 lbs (3,629 kg) of baggage and move it at 20 - 25 mph (32 - 40 kph) with our rugged, heavy-duty open carts.

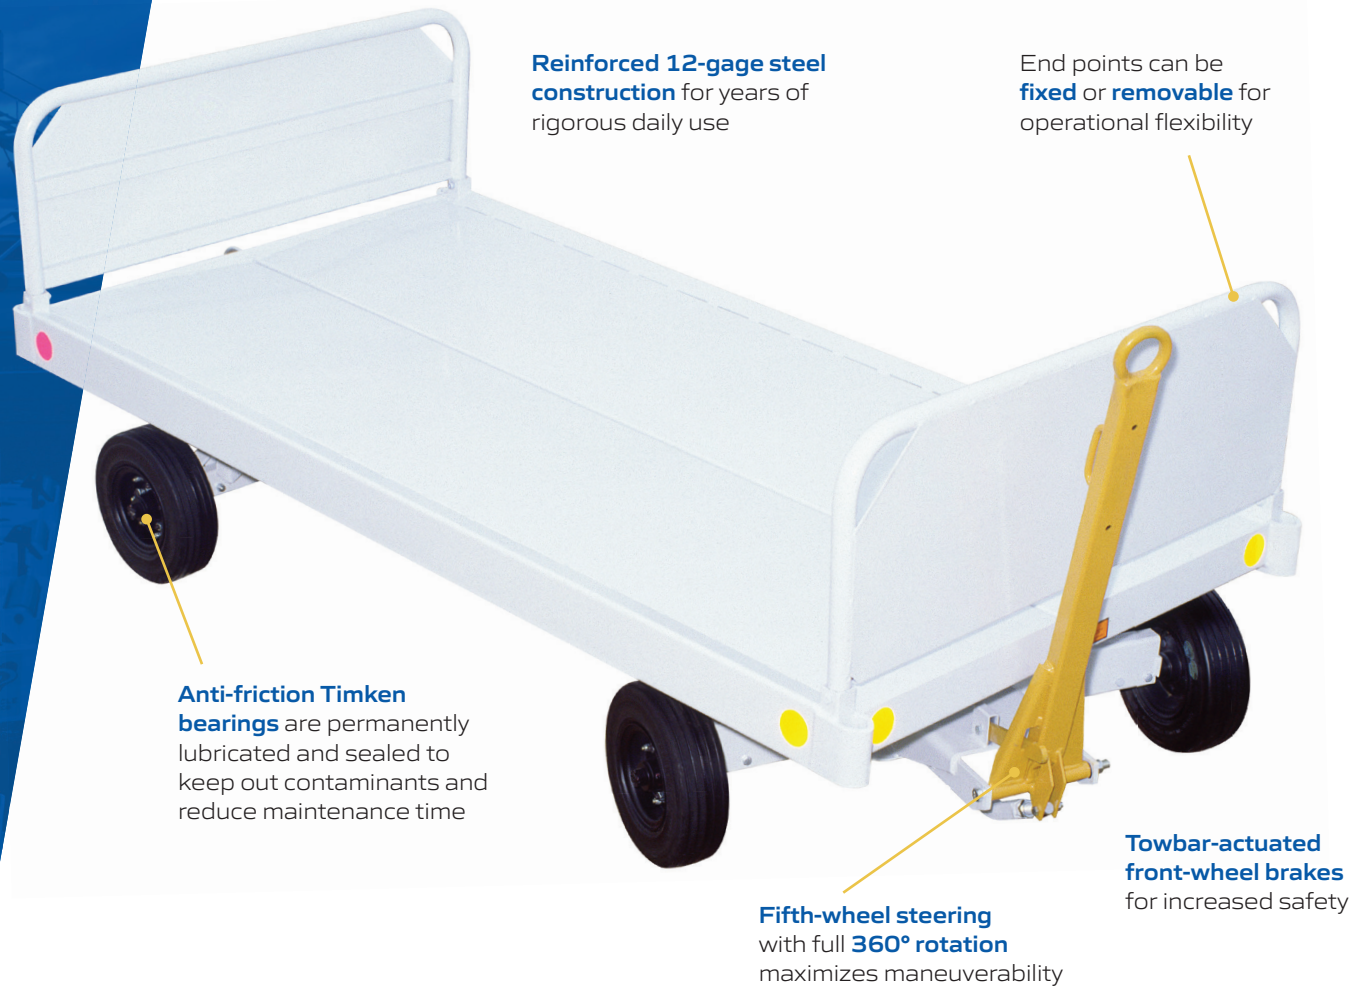




Options

- Choose from **rigid-mount** running gear or **four-wheel independent** rubber torsion axles
- **Tarps** and **holders** available to cover cart for protection from the weather
- Choose from **flat** or **v-style** floor designs

CARTS
LOADERS
DOLLIES
STAIRS
RACKS
DECKS

SPECIFICATIONS

Capacity	Up to 8,000 lbs (3,629 kg)
Weight	1,100 - 1,240 lbs (499 - 562 kg)
Length / Width / Height	119 in x 60 in x 47.5 in (302.3 cm x 152.4 cm x 120.7 cm)
Track Width	52.75 in (134 cm)
Rear Hitch	Spring-loaded E-hitch
King Pin	1.5-2 in (3.8-5.1 cm) diameter, stress-proof w/sealed Timken bearings
Hubs	1.375 in (3.49 cm) diameter sealed, tapered roller bearings
Panels	Body: 16-gauge, CR sheet Floor: 12-gauge, CR sheet, flat or v-style
Tires	Pneumatic sizes: 4.8 x 8 in (12.2 x 20.3 cm); 5.7 x 8 in (14.5 x 20.3 cm); 6.9 x 9 in (17.5 x 22.9 cm) Solid sizes: 4 x 8 in (10.2 x 20.3 cm) / 16 in (40.6 cm) diameter; 5 x 8 in (12.7 x 20.3 cm) / 18 in (45.7 cm) diameter
Running Gear	Rigid-mount or four-wheel independent rubber torsion axles, with 5 x 2 x 3/16 in (12.7 x 5.1 x 0.48 cm) wall, rectangular tubing

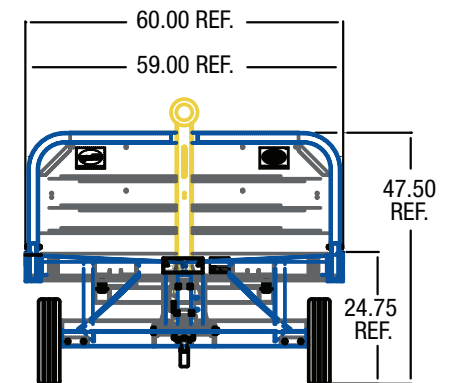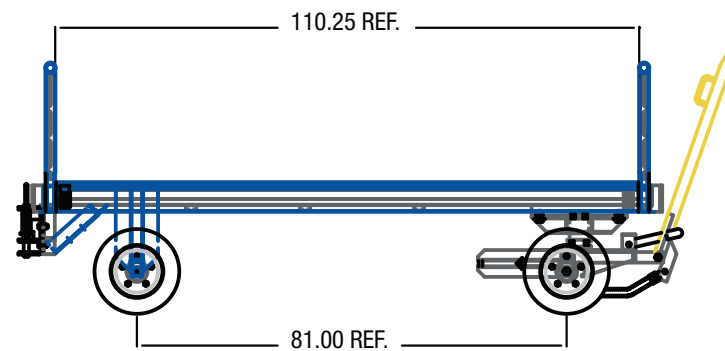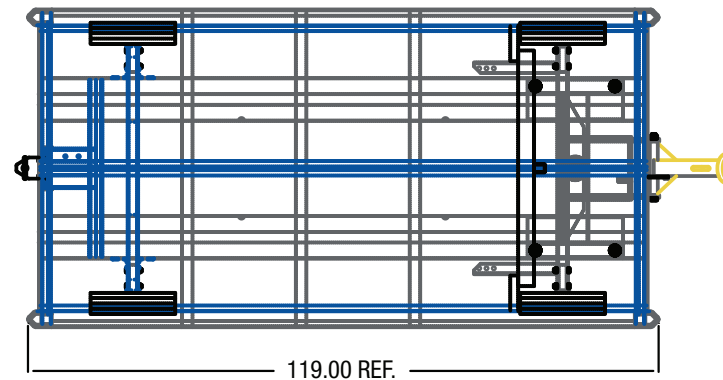

CARTS
LOADERS
DOLLIES
STAIRS
RACKS
DECKS

A world leader in ground support equipment for 40 years, we design, build and service a broad range of robust, ruggedly-built, dependable equipment for the airline and air cargo industry.

To learn more, contact our knowledgeable and experienced Team:

info@fastsolutions.com +1 (320) 634-5886 fastsolutions.com