

Enclosed Bravo Cart

**Protect up to 8,000
pounds from the elements**

Move more baggage faster with
a reinforced steel cart designed
for years of rugged use.



Vinyl curtains to protect baggage
from the elements

Corner bumpers to
protect from damage
on the ramp

A **fully integrated towbar**
and **hitch** allow for safe
movement at 20 - 25 mph
(32 - 40 kph)

Full **360° fifth-wheel** rotation allows the
carts to track correctly in any direction for
safety and easy maneuverability



Options

- **Bolt-in shelves** to manage baggage placement
- **V-style floors** to move moisture away and reduce baggage drag

CARTS
LOADERS
DOLLIES
STAIRS
RACKS
DECKS

SPECIFICATIONS

Capacity	Up to 8,000 lbs (3,629 kg)
Weight	1,300 - 1,500 lbs (590-680 kg)
Length/Width/Height	116 in x 60 in x 79.75 (294.6 cm x 152.4 cm x 202.6 cm)
Track Width	52.75 in (134 cm)
Rear Hitch	Spring-loaded E-hitch
King Pin	2 in (5.1 cm) diameter, stressproof with sealed bearings
Hubs	1.375 in (3.49 cm) diameter sealed, tapered roller bearings
Panels	Body: 16-gauge, CR sheet Floor: 14-gauge, CR sheet, V-style
Tires	Solid sizes: 4 x 8 in (10.2 x 20.3 cm) / 16 in (40.6 cm) diameter
Running Gear	Rigid mount or four-wheel axles, with 5 x 2 x 3/16 in (12.7 x 5.1 x 0.48 cm) front wall, 3 x 2 x 3/16 in (7.6 x 5.1 x 0.48 cm) rear wall, rectangular tubing

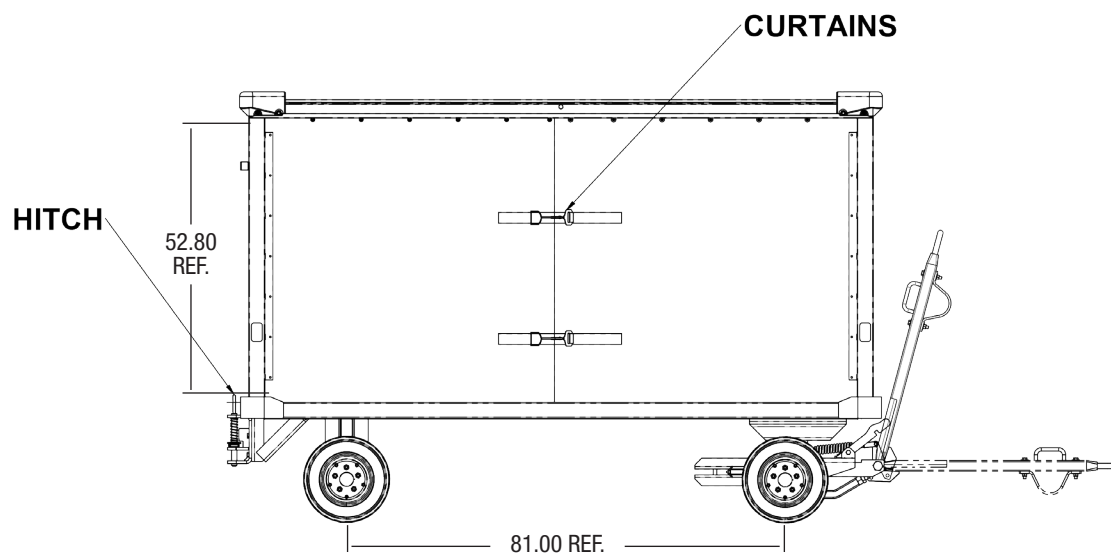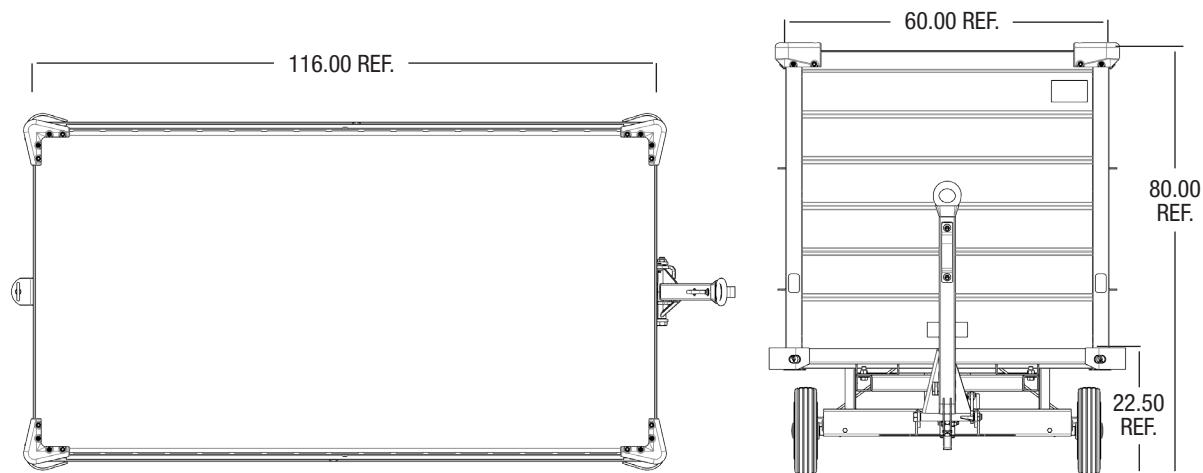

CARTS
LOADERS
DOLLIES
STAIRS
RACKS
DECKS

A world leader in ground support equipment for over 40 years, we design, build and service a broad range of dependable equipment for the airline and air cargo industry.

To learn more, contact our knowledgeable and experienced Team:

info@fastsolutions.com +1 (320) 634-5886 fastsolutions.com